


# NE-Series Padlock High Security



## Application

High Security padlock, for general use.

## Operation

The shackle is locked by a double ball bearing mechanism. Rotate key 60° to unlock.

## Materials

Body: case hardened steel  
Shackle: hardened boron alloy steel

## Finish

Black electrophoretic

## Additional features

- Key retaining
- Drilling protection
- Protective shutter prevents dust contamination
- Drainage holes prevent freezing

## Cylinder mechanism

Mul-T-Lock's unique high precision pin tumbler system. Pick and drill resistant for High Security needs.

## Keys


Reversible nickel silver key with plastic key head and colored insert for identification. Also available in all nickel silver.

## Cylinder options

- Interactive®+, MT5® platforms
- Keyed different, keyed alike
- Master keyed

## Standards

EN12320

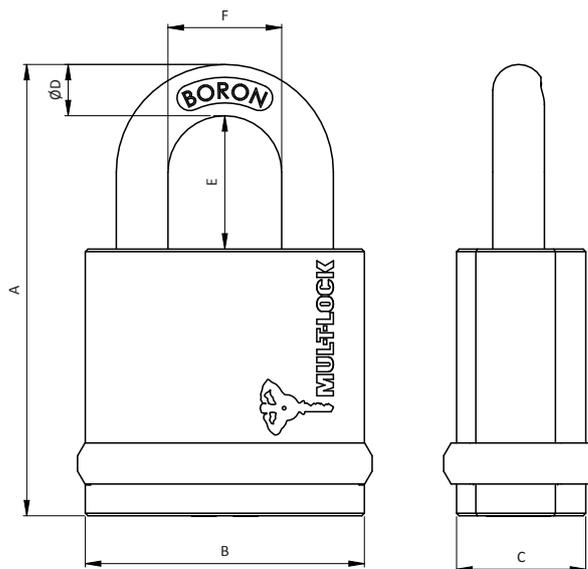

Model		Body			Shackle			Standard Grade
		A	B	C	D	E	F	
NE10L	mm	95	54	25	10	25	28	4
	Inch	3.74	2.12	1	0.39	1	1.10	
NE12L	mm	101	66	28	12	25	30	5
	Inch	3.97	2.60	1.10	0.47	1	1.18	
NE14L	mm	105	66	28	14	26	32	6
	Inch	4.13	2.60	1.10	0.55	1.02	1.26	

